



FOR REFERENCE ONLY, SEE DRAWING RJ7100YM
FOR INDIVIDUAL BALLON NUMBERS

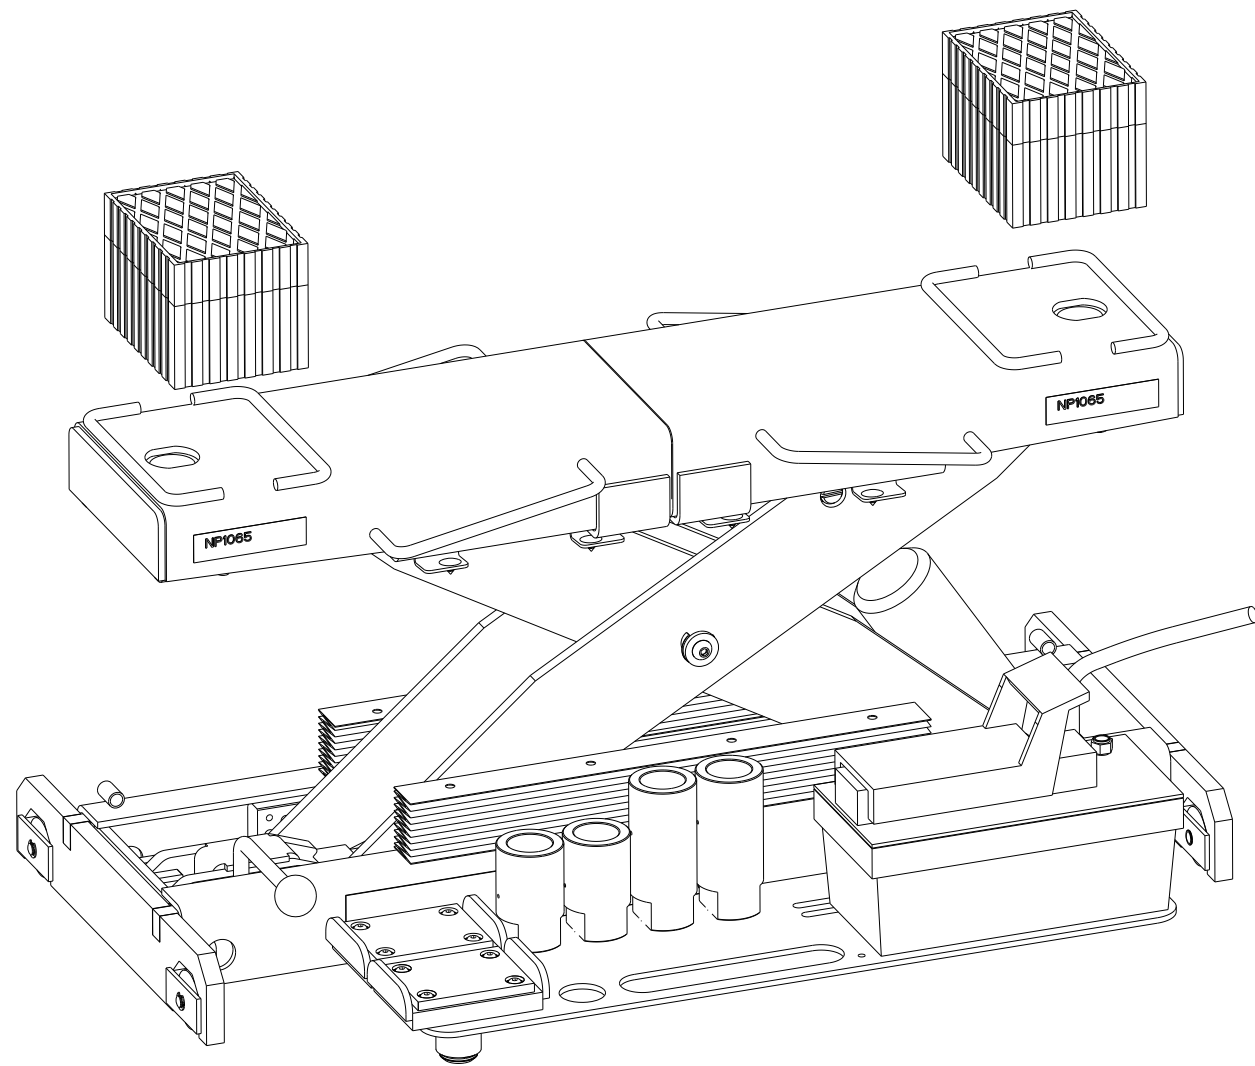

NOTE:
*PUMP PRESSURE MUST BE RESET:
SET PRESSURE = 249 BAR (3611 PSI)

QTY	PN	DESCRIPTION	
7	2	TI30661	SL210 5" ADAPTER EXTENSION
6	2	TI30660	SL210 3-12" ADAPTER EXTENSION
5	2	41462	M8X1.25 X 20mm Lg. HHCS
4	1	FC5972	ROLLING VRIDGE PUMP 290 BAR
3	1	NP909	ADD RJ6100YM LABEL
2	-1	NP909	REMOVE RJ7100YM LABEL
1	1	RJ7100YT	6K/7K ROLLING JACK BASE ASSEMBLY

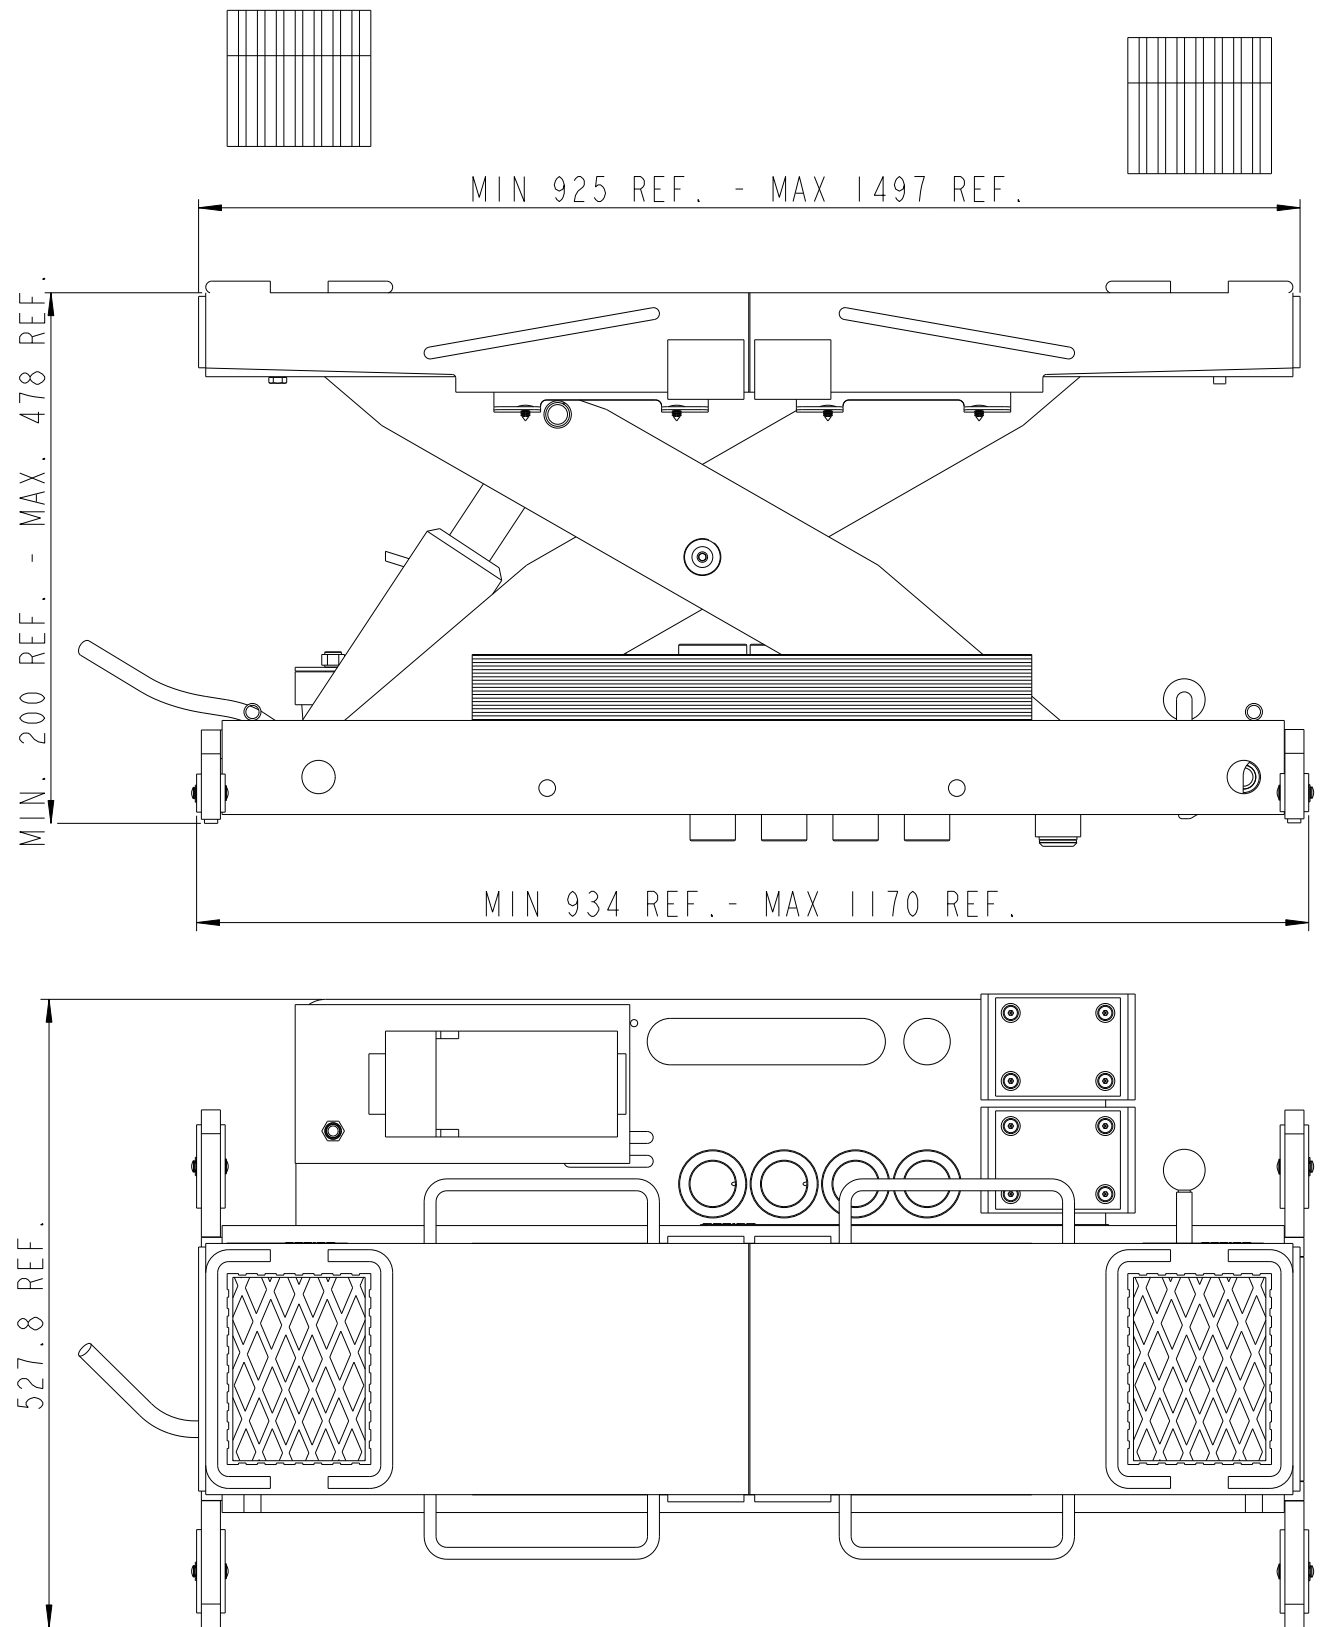

B	11534	TDC/RJS	2/23/21	RJ6100Y总装配 6K ROLLING JACK COMPLETED ASSEMBLY	RJ6100YM
A	11220	CTE/RJS	2/18/20		
-	11092.1	LJ/RJS	10/9/19		
标记 REV	数量 QTY	更改文件 CO NUM	签字 BY	日期 DATE	
设计 DESIGN			标准 STANDARD		
校对 VERIFY			审核 APPROVED		
审核 CHECK					
工艺 TECHNICS			日期 DATE		
图样标记 PHASE TAG		数量 QTY	重量 WEIGHT	比例 SCALE	
				1:6	
共 页 (ALL NO.)		第 1 页 (SHEET NO.)			
					Rotary Lift Consolidated (Haimen)Co.,Ltd

Rotary 品牌标志公差
角度公差: ±1°
长度公差: ±0.08mm (< 305mm)
±1.0mm (> 305mm)